


PRODUCT SPECIFICATION SHEET

Cabinet Extrusion Lighting System



Rev. C1

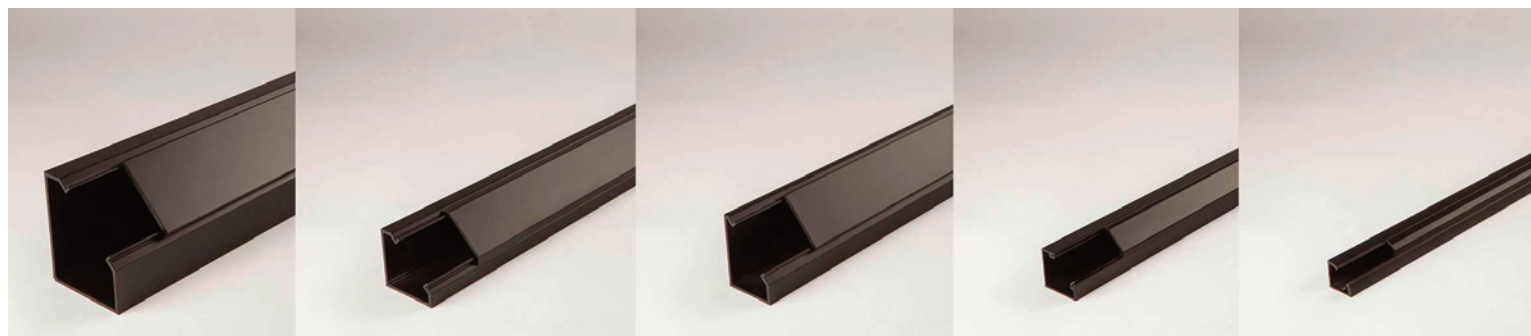

Cabinet mounting extrusions allow the use of conventional recessed downlight type fittings where it is only possible to surface mount.

The extrusion forms a conduit which conceals the fibre tails until they can be exited from the end. We normally supply the harness pro-fitted to the extrusion or we can supply the extrusion on its own.


There are five different sizes of extrusion available, from the largest, CX1, to the smallest, CX5. All of our extrusions have different sliding from faces to allow fibre and fittings to be mounted easily.

The small CX5 extrusion is unique in that it does not allow for downlights to be fitted to it. Instead it allows for the mounting of fibre tails which shine out through the small holes in the extrusions surface.

STANDARD LENGTHS

Part Number	CX1	CX2	CX3	CX4	CX5
Standard Length	6 metres	4 metres	3 metres	3 metres	3 metres

Extrusions come as standard in the maximum lengths above. They can be cut to the size required, or joined to make longer lengths.

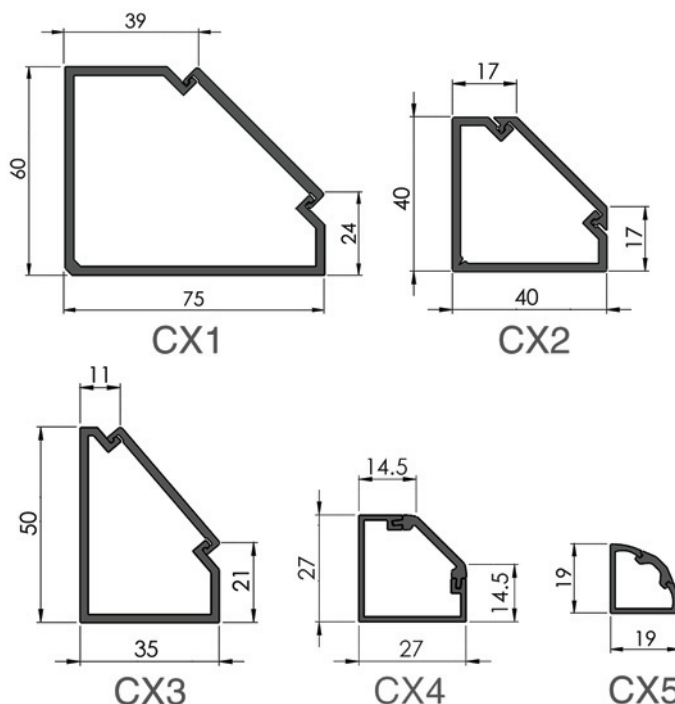

COMPATIBLE DOWNLIGHT FITTINGS

We offer a range of three different downlight fittings to fit in these extrusions. The larger extrusions (CX1, CX2 & CX3) can be used with any of these fittings, whilst the smaller extrusion (CX4) is suitable for use with the UFO34DA or UFO34DB fittings.



UFO 14DB



UFO 34DA



UFO 34DB



Universal Fibre Optics Ltd
Home Place \ Coldstream
TD12 4DT \ UK
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA LLC
1749 Northgate Blvd
Sarasota \ FL34234 \ USA
941-343-8115 \ www.fiberopticalighting.com

UFO Licht GmbH
Andreasstraße 20
93059 Regensburg \ Deutschland
+49 (0)9491 955880 \ www.ufo-licht.de