

# PRODUCT SPECIFICATION SHEET

## LD3 LED Downlight




Rev. C1



The versatile LD3, which can tilt up to 27° in 2 directions, comes with a choice of narrow, medium and wide beam options to allow you to direct the light exactly where it is needed. Fitted with springs to allow easy installation into the mounting surface.

Available in a range of colour temperatures with a high colour rendition and multiple methods of dimming, the aluminium fitting is ideally suited for indoor use in residential and architectural sectors amongst others.

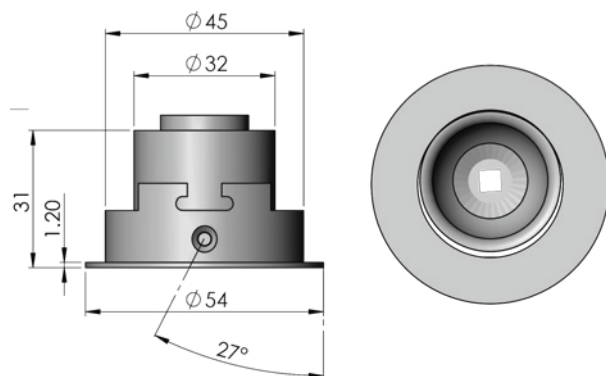

### TECHNICAL INFORMATION

|                                              |                                                                                                        |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Light Source                                 | LED                                                                                                    |
| Operating Environment                        | Indoor                                                                                                 |
| Material                                     | Aluminium                                                                                              |
| Finishes                                     | Black, silver, white, custom RAL to order                                                              |
| Securing Method                              | Secured through surface with spring clips                                                              |
| Power Consumption                            | 1W per fitting                                                                                         |
| Voltage                                      | 3.2V nominal                                                                                           |
| Colour Temp. & CRI                           | 2700K - 98CRI (typical) / 3000K - 98CRI (typical)<br>4000K - 97CRI (typical) / 5700K - 91CRI (typical) |
| Typical Luminous Flux<br>(based on 19° lens) | 2700K: 61lm/W / 3000K: 65lm/W<br>4000K: 72lm/W / 5700K: 96lm/W                                         |
| Optics                                       | 13.5° / 19° / 28°                                                                                      |
| Articulation                                 | Overall 54° tilt                                                                                       |

### DRIVER CONTROL OPTIONS (Depending on specified driver)

|               |                              |
|---------------|------------------------------|
| No Dimming    | Local Potentiometer Dimming  |
| 0-10V Dimming | Remote Potentiometer Dimming |

### PRODUCT CODES

| MODEL   | OPTICS |    | COLOUR TEMP |    | FLANGE COLOUR |    |
|---------|--------|----|-------------|----|---------------|----|
| UFO LD3 | 13.5°  | 13 | 2700K       | 27 | Black         | BL |
|         | 19°    | 19 | 3000K       | 30 | Silver        | SV |
|         | 28°    | 28 | 4000K       | 40 | White         | WH |
|         |        |    | 5700K       | 57 | Custom        | CU |
|         |        |    |             |    |               |    |
| UFO LD3 | -      |    | -           |    | -             |    |

e.g. UFO LD3-13-27-BL



Universal Fibre Optics Ltd  
Home Place \ Coldstream  
TD12 4DT \ UK  
+44 (0)1890 883416 \ [www.ufo.lighting](http://www.ufo.lighting)

Universal Fiber Optic Lighting USA, LLC  
1749 Northgate Blvd  
Sarasota \ FL34234 \ USA  
941-343-8115 \ [www.fiberopticlighting.com](http://www.fiberopticlighting.com)

UFO Licht GmbH  
Andreasstraße 20  
93059 Regensburg \ Deutschland  
+49 (0)9491 955880 \ [www.ufo-licht.de](http://www.ufo-licht.de)