


PRODUCT SPECIFICATION SHEET

LD5 LED Downlight




Rev. C4

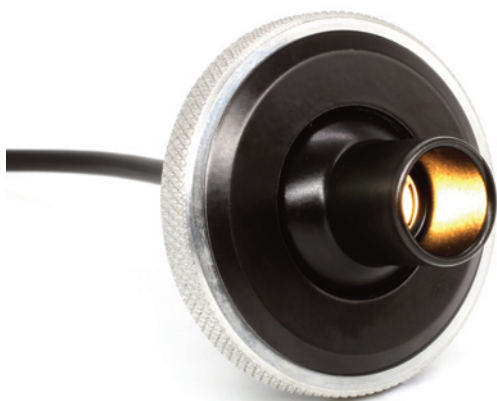

Recessed LED downlight fitting with adjustable snoot and choice of colour temperatures.

Supplied with a warm white or neutral white LED light and a CRI of >95 that ensures colours are shown in their true light, the LD5 is particularly useful for illuminating static objects within display cabinets and fixtures due to its adjustable nature.

Integral to the front of the fitting is a slim snoot that can tilt up to 35°, allowing you to focus on a concentrated beam of light in almost any direction required.



TECHNICAL INFORMATION

Light Source	LED
Operating Environment	Indoor
Material	Aluminium
Finishes	Black, silver, white, custom RAL to order
Mounting Hole Size	32mm
Power Consumption	1W per fitting
Voltage	2.75V (min) 3.2V (typical) 3.5V (max)
Colour Temp. & CRI	2700K - 98CRI (typical) / 3000K - 98CRI (typical) 4000K - 97CRI
Typical Luminous Flux (based on 19° lens)	2700K: 55lm/W / 3000K: 58lm/W 4000K: 63lm/W
Optics	16° / 23° / 36° / 61°
Articulation	Tilt: 35° / Rotation: 360°

DRIVER CONTROL OPTIONS (Depending on specified driver)

No Dimming	Local Potentiometer Dimming
0-10V Dimming	Remote Potentiometer Dimming

PRODUCT CODES

MODEL	OPTICS		COLOUR TEMP		FLANGE COLOUR	
UFO LD5	16°	16	2700K	27	Black	BL
	23°	23	3000K	30	Silver	SV
	36°	36	4000K	40	White	WH
	61°	61			Custom	CU

UFO LD5	-		-		-	
---------	---	--	---	--	---	--

e.g. UFO LD5-16-27-BL



Universal Fibre Optics Ltd
Home Place \ Coldstream
TD12 4DT \ UK
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC
1749 Northgate Blvd
Sarasota \ FL34234 \ USA
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH
Andreasstraße 20
93059 Regensburg \ Deutschland
+49 (0)9491 955880 \ www.ufo-licht.de